

INNER DC BLOCK 380-2700MHZ N

SD3071


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 800-2700 MHZ
DEGRADED PERFORMANCE 380MHZ-800MHZ
POWER: 250W AVG
IMPEDANCE: 50 OHMS
VSWRmax: 1.20:1 MAX 800-2700 MHZ;
VSWRin: 1.35:1 MAX 380-800MHZ
LOSS: 0.1 DB MAX 800-2700MHZ
LOSS 380MHZ 0.25 DB
IP2 <140 dBc MAX (2 @ +43DBM)

MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINUM
CONNECTORS: N, Si OR TRIPLATE
TEMP RANGE: -35 TO +75° C
IP65

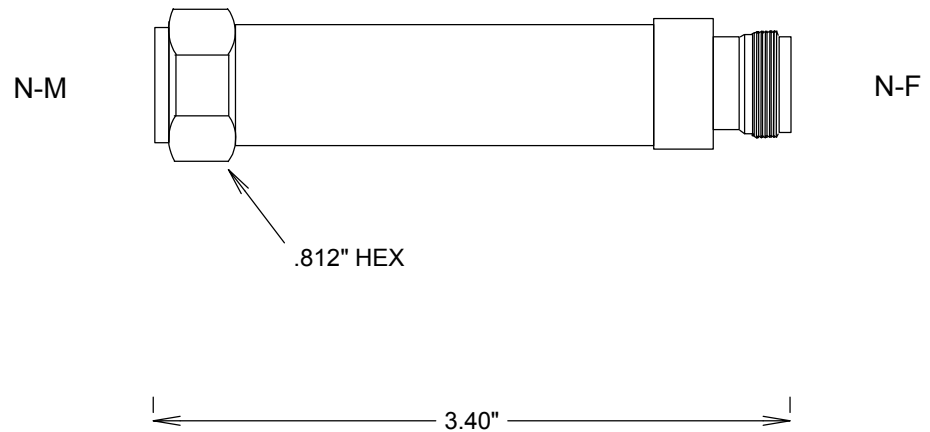

				FAIRVIEW MICROWAVE INC.			
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
				TITLE			
				INNER DC BLOCK 380-2700MHZ N			
SIZE	CAGE CODE	DWG NO				REV	
A	3FKR5	SD3071					
SCALE				SHEET			