

SMA INNER DC BLOCK .005-18GHZ

SD3241

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0.005-18 GHZ

INSERTION LOSS: 0.8 DB MAX

VSWR 1.35 MAX


BREAKDOWN VOLTAGE: 50 VOLTS

MATERIALS, BODY: BRASS

PLATING, BODY: TRIMETAL

PLATING, CONTACTS: GOLD

OP TEMPERATURE: -40 TO +115 DEG C

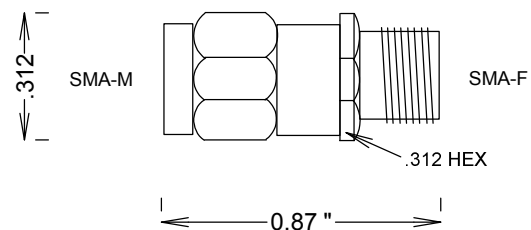

CENTER PIN HAS DC BLOCKING CAP

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA INNER DC BLOCK .005-18GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SD3241	

SCALE

SHEET