

# 2.92 M/F INNER DC BLOCK 10MHZ-40GHZ


SD3379

## SPECIFICATIONS

**ELECTRICAL:**

FREQUENCY: 10MHZ-40GHZ  
 INSERTION LOSS: 0.75 DB MAX@ 40GHZ  
 BREAKDOWN VOLTAGE: 200 VOLTS  
 VSWR: 1.45:1 MAX

MATERIALS, BODY: PASSIVATED S STEEL  
 CONTACTS: BeCu  
 PLATING, CONTACTS: Au, MIL-G-45204  
 OP TEMPERATURE: -55 TO +115 DEG C  
 INTERFACE: MIL-STD-348B

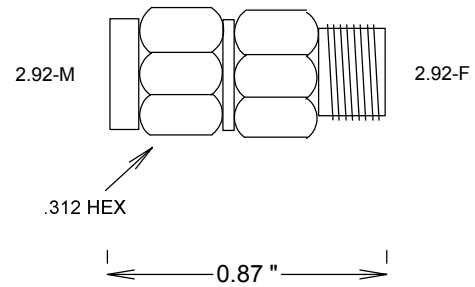

CENTER PIN HAS DC BLOCKING CAP

				<b>FAIRVIEW MICROWAVE INC.</b>			
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
				TITLE			
				2.92 M/F INNER DC BLOCK 10MHZ-40GHZ			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SD3379			
SCALE				SHEET			