

SPECIFICATIONS

ELECTRICAL

50 OHMS
 VSWR 1.10:1 MAX @ 27GHZ
 VSWR 1.15:1 MAX @ 40GHZ
 VSWR 1.18:1 MAX @ 50 GHZ
 FREQUENCY: 0-50 GHZ

MECHANICAL




500 CYCLES MIN
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL

-55° C TO +125° C

MATERIALS

BODY: PASS STAINLESS STEEL
 CENTER CONTACTS BeCu, Au PLATED
 PER MIL-G-45204

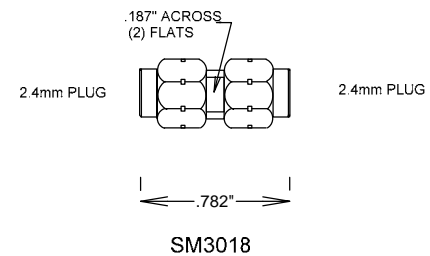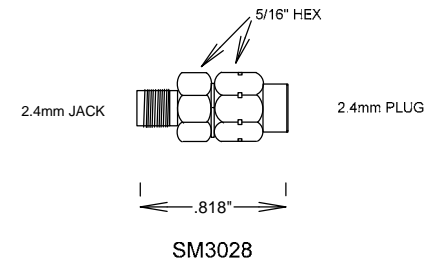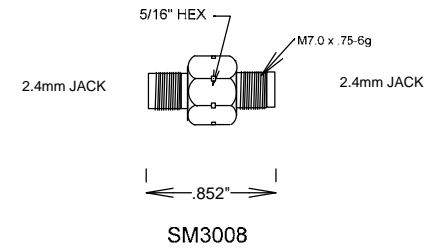

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				2.4mm - 2.4mm ADAPTERS 50GHZ	
SIZE		CAGE CODE	DWG NO		REV
A		3FKR5	SM3008, SM3018, SM3028		--
SCALE				SHEET	