


SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.30:1 MAX @ 50 GHZ
 FREQUENCY: 0-50 GHZ

MECHANICAL
 500 CYCLES MIN
 4.0 INCH-OUNCES MIN CONTACT TORQUE
 8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -55 DEG C TO +100 DEG C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL
 BODY: SST ASTM A484 / A582
 BeCu ATSM-B-196
 PASSIVATED ASTM A380
 CENTER CONTACTS Au PLATED
 MIL-G-45204

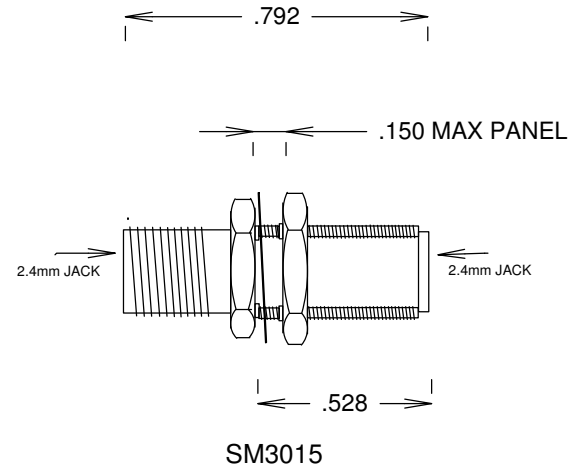

RECOMMENDED PANEL CUTOUT

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				2.4mm / 2.4mm F/F BULKHEAD ADAPTER 50 GHZ	
SIZE		CAGE CODE	DWG NO		REV
A			SM3015		B
SCALE				SHEET	