





SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.15:1 MAX @ 33 GHZ

MECHANICAL
 500 CYCLES MIN
 4.0 INCH-OUNCES MIN CONTACT TORQUE
 8-10 LBS COUPLING NUT MATING TORQUE
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL
 -55 TO +135° C

MATERIALS
 BODY: PASS. S STEEL
 CONTACT: BeCu
 CONTACT PLATING: Au, MIL-G-45204
 DIELECTRIC: KEL-F PER MIL-P-46036

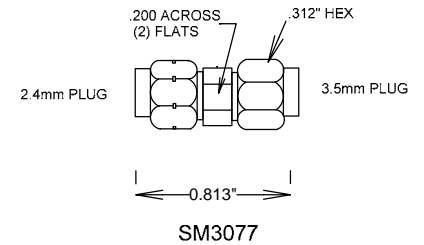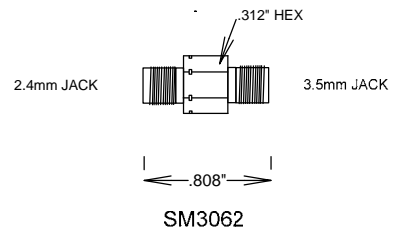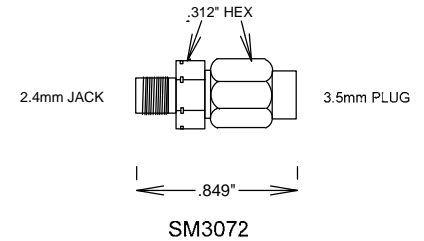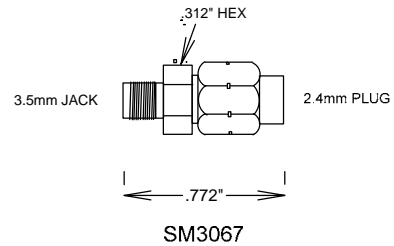

				S. M. ELECTRONICS			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				2.4mm - 3.5mm ADAPTERS 33GHZ			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SM3062, SM3067, SM3072, SM3077		--	
SCALE				SHEET			