




SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.25:1 MAX @ 40 GHZ
 FREQUENCY: 0-40 GHZ
 MODE FREE TO 46 GHZ

MECHANICAL
 500 CYCLES MIN
 4.0 INCH-OUNCES MIN CONTACT TORQUE
 8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -55 TO +100 °C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS
 BODY: PASSIVATED STAINLESS STEEL
 CENTER CONTACTS: BeCu Au PLATED

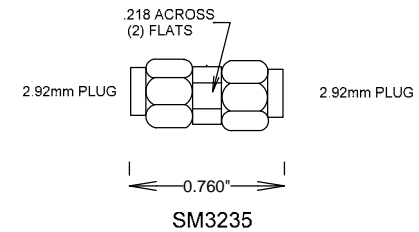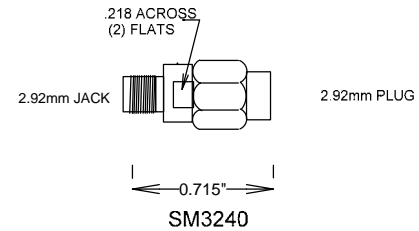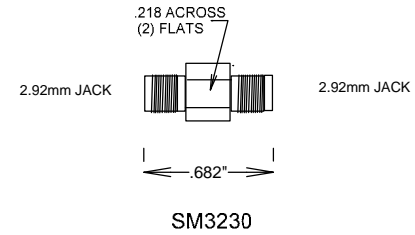

S. M. ELECTRONICS

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

2.92mm - 2.92mm ADAPTERS 40GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3230, SM3235, SM3240	A
SCALE			SHEET