




SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.25:1 MAX @ 34 GHZ
 FREQUENCY: 0-34 GHZ

MECHANICAL
 500 CYCLES MIN
 4.0 INCH-OUNCES MIN CONTACT TORQUE
 8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -55 DEG C TO +105 DEG C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL
 BODY: SST ASTM A484 / A582
 BeCu ATSM-B-196
 PASSIVATED ASTM A380
 CENTER CONTACTS Au PLATED
 MIL-G-45204

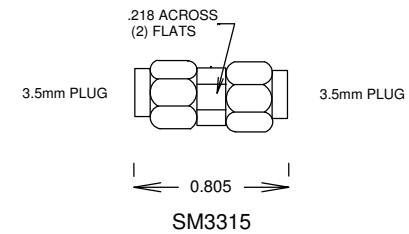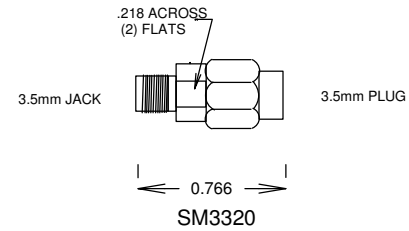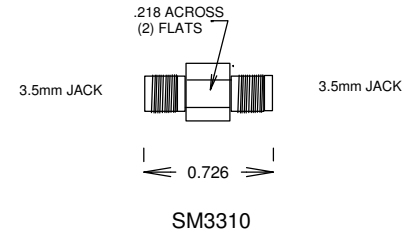

S. M. ELECTRONICS

TITLE

3.5mm - 3.5mm ADAPTERS 34GHZ

SIZE	CAGE CODE	DWG NO	REV
A		SM3310, SM3315, SM3320	A
SCALE			SHEET