

# SPECIFICATIONS

## ELECTRICAL

50 OHMS  
 VSWR 1.15:1 MAX @ 34 GHZ  
 FREQUENCY: 0-34 GHZ

## MECHANICAL





500 CYCLES MIN  
 4.0 INCH-OUNCES MIN CONTACT TORQUE  
 8-10 LBS COUPLING NUT MATING TORQUE

## ENVIRONMENTAL

-65 DEG C TO +85 DEG C  
 CORROSION: MIL-STD 202  
 VIBRATION: MIL-STD 202

## MATERIALS PASSIVATED STAINLESS STEEL

BODY: SST ASTM A484 / A582  
 BeCu ATSM-B-196  
 PASSIVATED ASTM A380  
 CENTER CONTACTS Au PLATED  
 MIL-G-45204

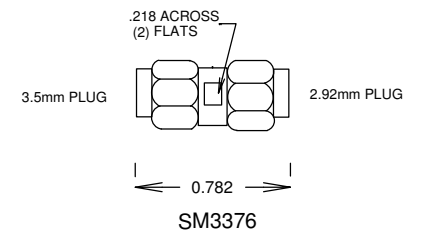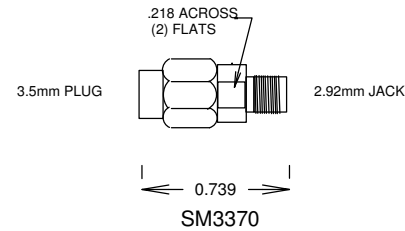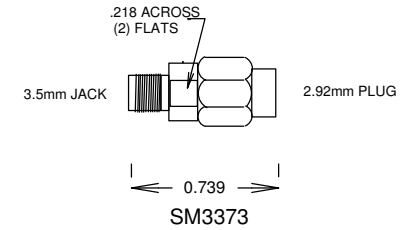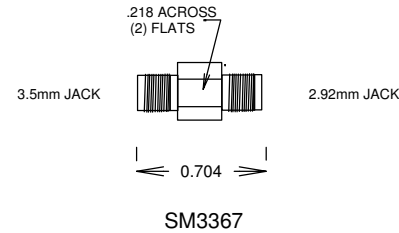

**S. M. ELECTRONICS**

FAIRVIEW, TX    WWW.SMELECTRONICS.US

TITLE

**2.92mm - 3.5mm ADAPTERS 34GHZ**

SIZE <b>A</b>	CAGE CODE	DWG NO SM3367, SM3370, SM3376	REV <b>A</b>
------------------	-----------	----------------------------------	-----------------

SCALE	SHEET
-------	-------