


SPECIFICATIONS

ELECTRICAL


FREQUENCY: 0-4 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.2:1 MAX @ 4GHZ

MECHANICAL


MATERIAL BODY: NICKEL PLATED BRASS
 CONTACT PLATING: Au PER MIL-G-45204
 FEMALE CONTACTS: BeCu
 INTERFACE: MIL-STD-348A

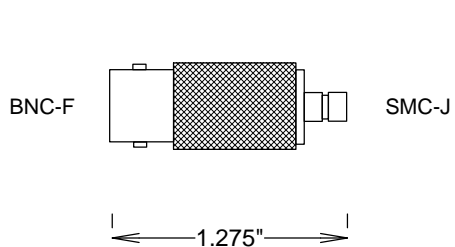


SM3680

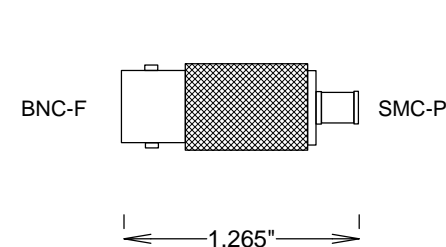

SM3632

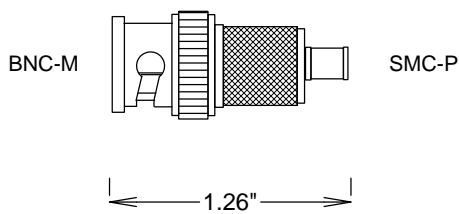

SM3684

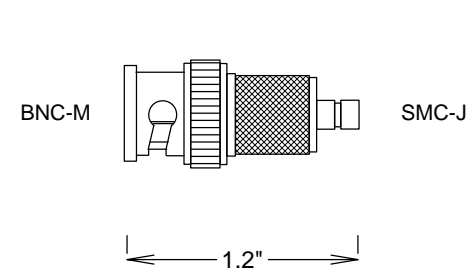

SM3686

S. M. ELECTRONICS

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

SMC-BNC ADAPTERS 4GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3680, SM3682, SM3684, SM3686	-

SCALE

SHEET