




SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.30:1 MAX @ 25 GHZ
 FREQUENCY: 0-25 GHZ

MECHANICAL
 100 CYCLES MIN
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL
 -55 DEG C TO +125 DEG C

MATERIALS NICKLE PLATED BRASS
 OPTIONAL PLATING: Au
 CONTACTS: BeCu ATSM-B-196
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON

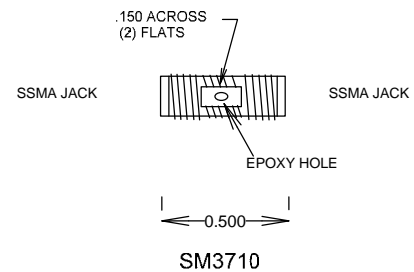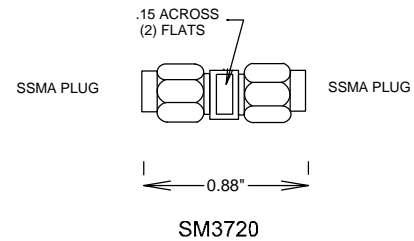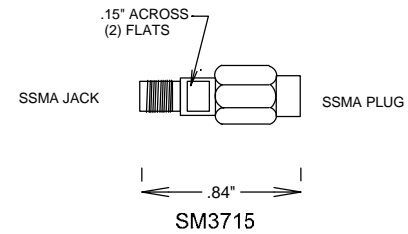

				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SSMA ADAPTERS 18GHZ			
SIZE	CAGE CODE	DWG NO		REV			
A	3FKR5	SM3710, SM3715, SM3720		--			
SCALE			SHEET				