

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 0-4 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.2:1 MAX

MECHANICAL

MATERIAL BODY: NICKEL PLATED BRASS
 CONTACTS: BeCu PER QQ-C-530
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348

ROHS COMPLIANT

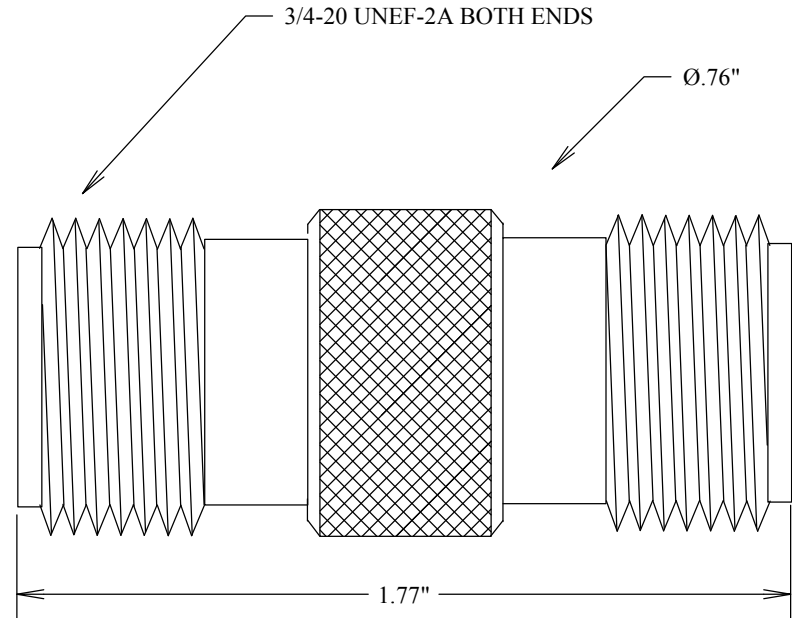

				S. M. ELECTRONICS L.L.C			
				FAIRVIEW, TX WWW.SMELECTRONICSLLC.COM			
				TITLE			
				HN FEMALE/FEMALE ADAPTER			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SM3910		A	
SCALE				SHEET			