


# SPECIFICATIONS

## ELECTRICAL


FREQUENCY: 0-12.4 GHZ  
 IMPEDANCE: 50 OHMS  
 VSWR: 1.2:1 MAX @ 6GHZ  
 VSWR: 1.4:1 MAX @ 11GHZ  
 VSWR: 1.5:1 MAX @ 12.4GHZ  
 VRMS: 1000 V SEA LEVEL

## MECHANICAL


MATERIALS BODY NICKEL PLATED BRASS  
 MATERIALS CONTACTS BeCu Au PLATING MIL-G-45204  
 IN ACCORDANCE WITH MIL-PRF-39012 & MIL-STD-348

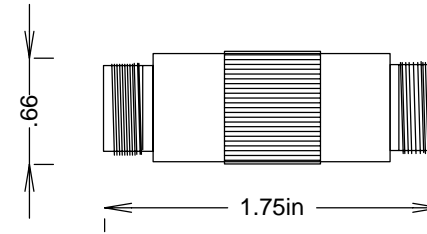

SM4021

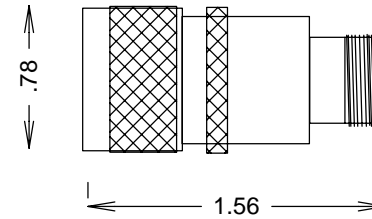

SM4016

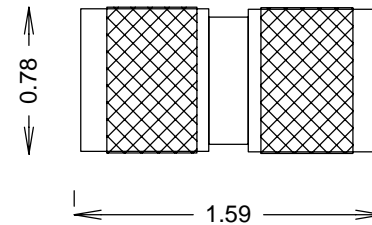

SM4013

**S. M. ELECTRONICS**

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

**N-N 12.4GHZ ADAPTERS**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4013, 4016, 4021	--

SCALE

SHEET