

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 0-18 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.15:1 MAX
 VRMS: 250 V SEA LEVEL

MECHANICAL


MATERIALS BODY PASS STAINLESS STEEL
 MATERIALS CONTACTS BeCu Au PLATING
 CONTACT CAPTIVATION: 6LBS MIN AXIAL FORCE
 CONTACT TORQUE: 4 IN-OUNCES MIN
 DURABILITY: 500 CYCLES MIN
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL


CORROSION MIL-STD-202
 VIBRATION MIL-STD-202
 SHOCK MIL-STD-202

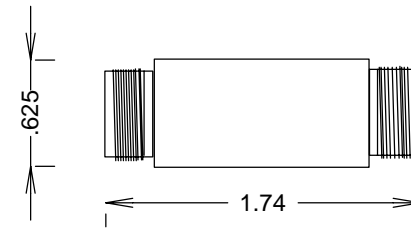

SM4032

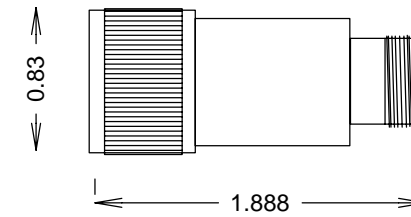

SM4017

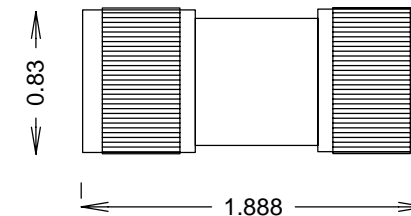

SM4014

S. M. ELECTRONICS

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

N-N 18GHZ PRECISION ADAPTERS

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4014, 4017, 4032	B
SCALE	SHEET		