


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-12.4 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.2:1 MAX 6GHZ, 1.35MAX 12.4GHZ

MECHANICAL

MATERIALS BODY NICKLE PLATED BRASS
 MATERIALS CONTACTS BeCu Au PLATING MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A
 DURABILITY: 500 CYCLES MIN

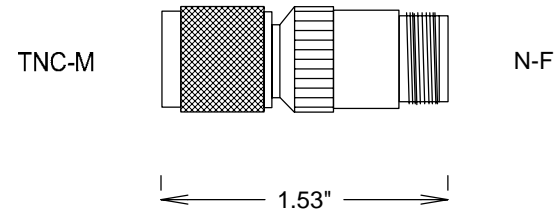

				S. M. ELECTRONICS	
				FAIRVIEW, TX WWW.SMELECTRONICS.US	
				TITLE	
				N/F-TNC/M ADAPTER 12.4GHZ	
SIZE	CAGE CODE	DWG NO			
A	3FKR5	SM4140	REV		
			--		
SCALE			SHEET		