


# SPECIFICATIONS

## ELECTRICAL

FREQUENCY: 0-6 GHZ  
 IMPEDANCE: 50 OHMS  
 VSWR 1.25:1 MAX

## MECHANICAL

MATERIALS, BODY: Au PLATED BRASS  
 MATERIALS, CONTACTS: BeCu, 30  $\mu$ " Au PLATING  
 MATERIALS, INSULATOR: TEFLON, ATSM D1457 & D1710  
 INTERFACE: MIL-STD-348A & BS EN 122440

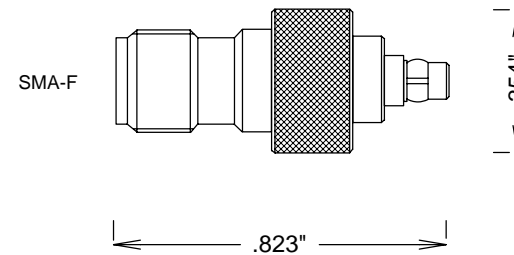

				<b>S. M. ELECTRONICS</b>	
				FAIRVIEW, TX WWW.SMELECTRONICS.US	
				TITLE	
				<b>MMCX/PLUG-SMA/FEMALE ADAPTER</b>	
SIZE	CAGE CODE	DWG NO	REV		
<b>A</b>	3FKR5	<b>SM4783</b>	--		
SCALE			SHEET		