
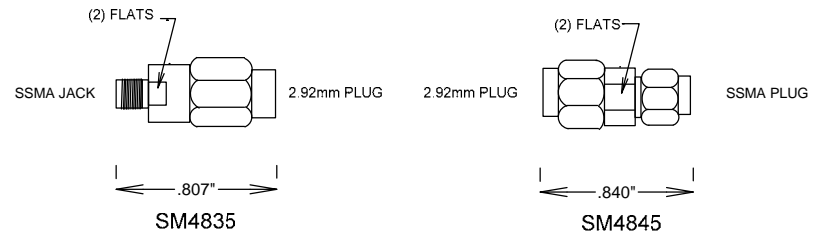


# SPECIFICATIONS

ELECTRICAL  
 50 OHMS  
 VSWR 1.25:1 MAX @ 40GHZ  
 FREQUENCY: 0-40 GHZ

MATERIALS PASSIVATED STAINLESS STEEL  
 CONTACTS: BeCu ATSM-B-196  
 CONTACT PLATING Au MIL-G-45204  
 INSULATOR: TEFLON  
 INTERFACE: MIL-STD-348B  
 -55°C TO +100 °C

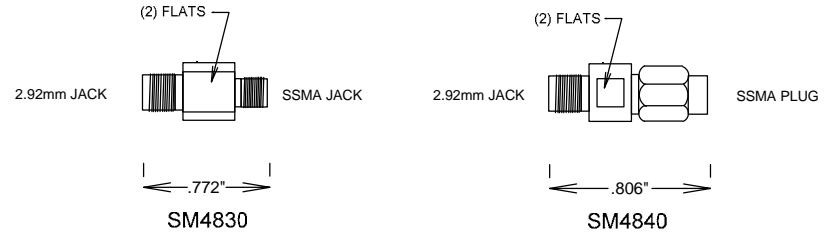

				<b>S. M. ELECTRONICS</b>			
				FAIRVIEW, TX <a href="http://WWW.SMELECTRONICS.US">WWW.SMELECTRONICS.US</a>			
				TITLE			
				<b>2.92mm - SSMA ADAPTERS 40GHZ</b>			
SIZE		CAGE CODE		DWG NO		REV	
<b>A</b>		<b>3FKR5</b>		SM4830, SM4835, SM4840, SM4845		--	
SCALE						SHEET	