




SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.20:1 MAX @ 10GHZ, 1.4@18
 FREQUENCY: 0-18 GHZ

MECHANICAL
 100 CYCLES MIN
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL
 -65 DEG C TO +125 DEG C

MATERIALS NICKLE PLATED BRASS
 OPTIONAL PLATING: Au
 CONTACTS: BeCu ATSM-B-196
 CONTACT PLATING: Au MIL-G-45204

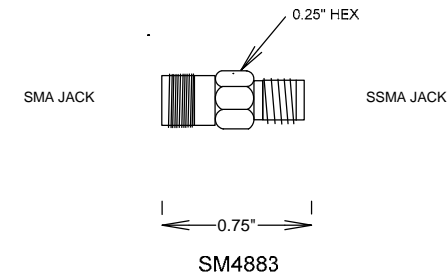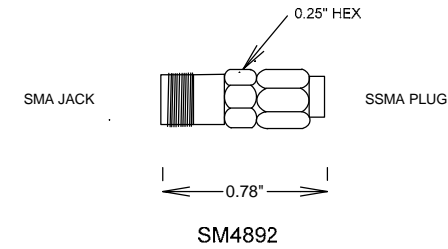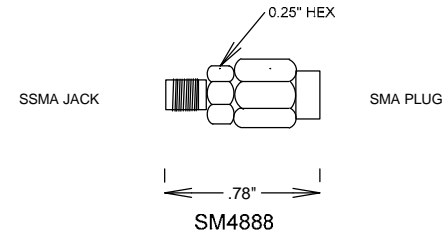

				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SMA-SSMA ADAPTERS 18GHZ			
SIZE	CAGE CODE	DWG NO		REV			
A	3FKR5	SM4883, SM4888, SM4892		A			
SCALE			SHEET				