


# SPECIFICATIONS

**ELECTRICAL**  
 50 OHMS  
 VSWR 1.20:1 MAX @ 18 GHZ  
 FREQUENCY: 0-18 GHZ

**MECHANICAL**  
 500 CYCLES MIN  
 7-10 LBS COUPLING NUT MATING TORQUE

**ENVIRONMENTAL**  
 -65 DEG C TO +85 DEG C

**MATERIALS BODY** PASSIVATED STAINLESS STEEL  
 CENTER CONTACTS BECU Au PLATED

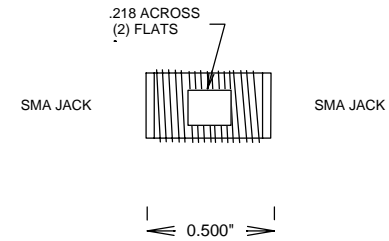

NO EPOXY HOLE FOR IMPROVED EMI PERFORMANCE

**S. M. ELECTRONICS**

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

**SMA F/F ADAPTERS NO EPOXY HOLE**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>SM4932</b>	<b>C</b>

SCALE	SHEET
-------	-------