


# SPECIFICATIONS

**ELECTRICAL**  
 50 OHMS  
 VSWR 1.15:1 MAX @ 18 GHZ  
 FREQUENCY: 0-18 GHZ

**MECHANICAL**  
 500 CYCLES MIN  
 7-10 LBS COUPLING NUT MATING TORQUE

**ENVIRONMENTAL**  
 -65 DEG C TO +85 DEG C  
 CORROSION: MIL-STD 202  
 VIBRATION: MIL-STD 202

**MATERIALS** PASSIVATED STAINLESS STEEL  
 BeCu CONTACTS  
 BODY: PASSIVATED STAINLESS STEEL  
 CENTER CONTACTS Au PLATED

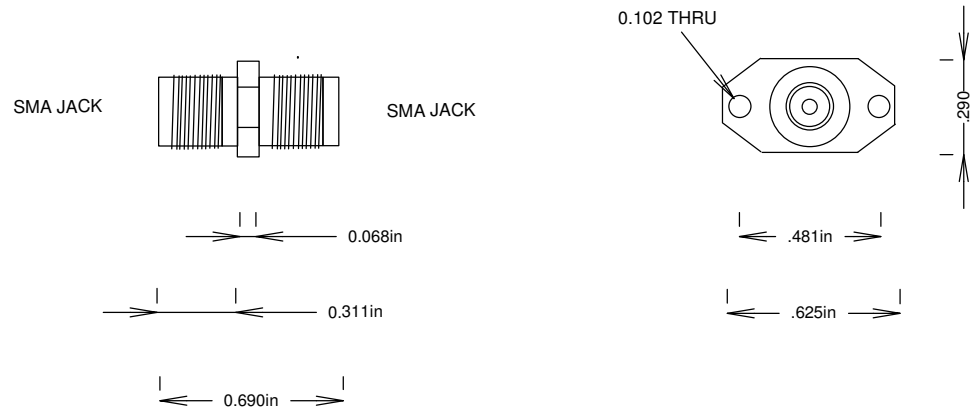

				<b>S. M. ELECTRONICS</b>			
				FAIRVIEW, TX 75069    WWW.SMELECTRONICS.US			
				TITLE			
				SMA F/F ADAPTER 2-HOLE FLANGE 18GHZ			
SIZE		CAGE CODE		DWG NO		REV	
<b>A</b>				<b>SM4940</b>		---	
SCALE						SHEET	