

SPECIFICATIONS

ELECTRICAL:

VSWR 2:1

IMPEDANCE: 50 OHMS


FREQUENCY: 0-3 GHZ 1 PORT UNTERMINATED
 0-10 GHZ ALL PORTS TERMINATED

MECHANICAL:

CONNECTORS: S STEEL, Au PLATED CONTACTS

HOUSING: S STEEL, Au PLATED

INTERFACES: MIL-STD-348A

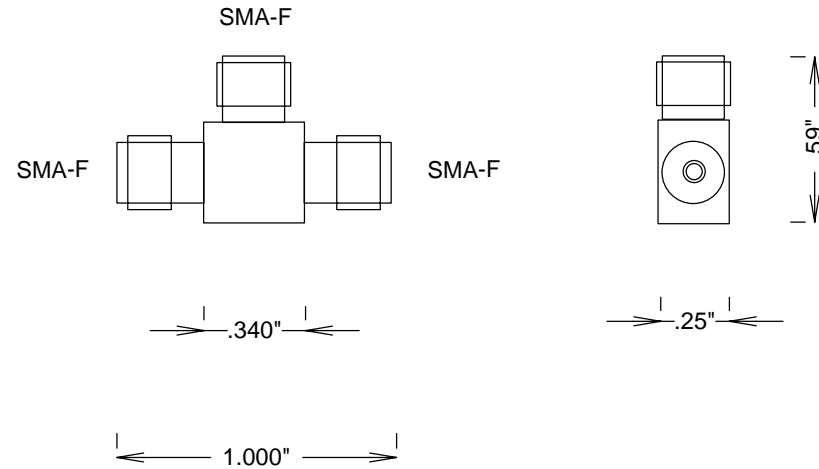

| | | | | | | | |
|----------|--|--------------|--|---|--|-------|--|
| | | | | S. M. ELECTRONICS | | | |
| | | | | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US | | | |
| | | | | TITLE | | | |
| | | | | SMA T F-F-F | | | |
| SIZE | | CAGE CODE | | DWG NO | | REV | |
| A | | 3FKR5 | | SM4945 | | | |
| SCALE | | | | | | SHEET | |