


SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.20:1 MAX @ 18 GHZ
 FREQUENCY: 0-18 GHZ

MECHANICAL
 500 CYCLES MIN
 7-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -65 DEG C TO +85 DEG C

MATERIALS PASSIVATED STAINLESS STEEL
 BeCu CONTACTS
 BODY: SM4949: PASSIVATED STAINLESS STEEL
 BODY: SM4931: Au PLATED STAINLESS STEEL
 CENTER CONTACTS Au PLATED

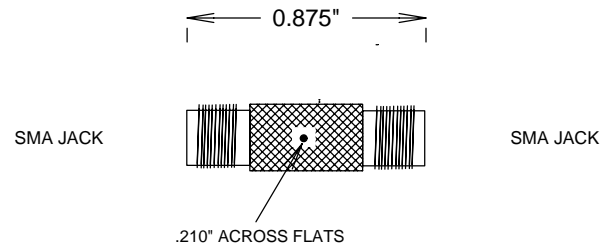

SM4931: AU PLATED STAINLESS STEEL
 SM4949: PASSIVATED STAINLESS STEEL

				S. M. ELECTRONICS			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SMA F/F ADAPTER KNURL 18GHZ			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SM4931, SM4949		A	
SCALE				SHEET			