




SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.20:1 MAX @ 27 GHZ
 FREQUENCY: 0-27 GHZ

MECHANICAL
 500 CYCLES MIN
 RECOMMENDED TORQUE: 7-9 IN-LBS
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL
 -65 DEG C TO +100 DEG C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS
 BODY PASSIVATED STAINLESS STEEL
 CONTACTS: BeCu
 CONTACT PLATING: Au MIL-G-45204

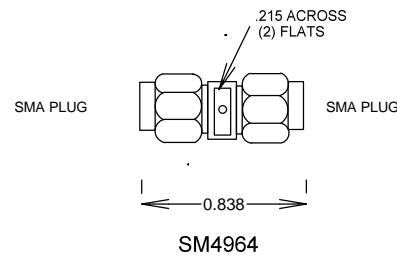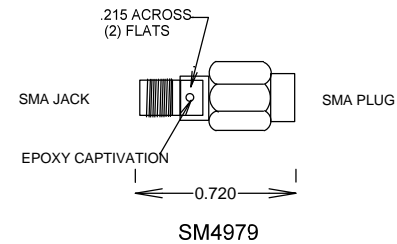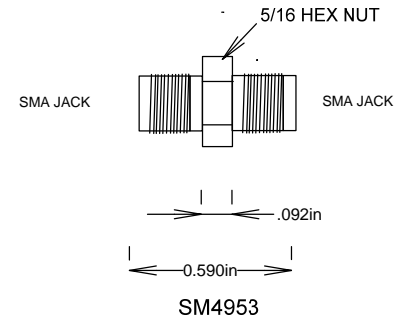

S. M. ELECTRONICS

FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

SMA ADAPTERS 27GHZ

| | | | |
|----------|-----------|------------------------|----------|
| SIZE | CAGE CODE | DWG NO | REV |
| A | 3FKR5 | SM4953, SM4964, SM4979 | A |
| SCALE | SHEET | | |