


SPECIFICATIONS

ELECTRICAL
 50 OHMS
 VSWR 1.20:1 MAX @ 18 GHZ
 FREQUENCY: 0-18 GHZ

MECHANICAL
 500 CYCLES MIN
 7-9 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
 -55 DEG C TO +100 DEG C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS SM4954 AU PLATED STAINLESS STEEL
 SM4955 PASSIVATED STAINLESS STEEL
BODY: SST ASTM A484 / A582
 BeCu ATSM-B-196
CENTER CONTACTS Au PLATED

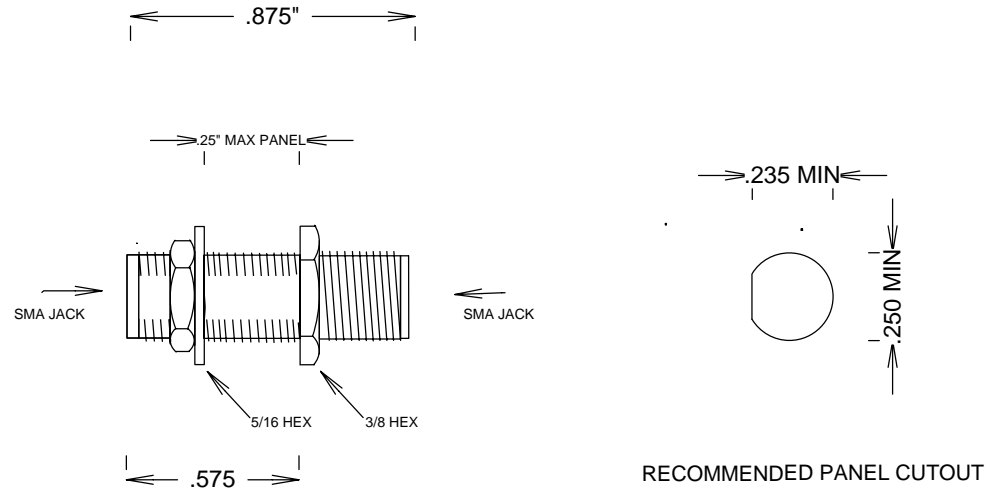

SM4954 AU PLATED
 SM4955 PASSIVATED

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				SMA/SMA BULKHEAD ADAPTER 18GHZ	
SIZE		CAGE CODE	DWG NO		REV
A		3FKR5	SM4954, SM4955		--
SCALE				SHEET	