



SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.15:1 TYPICAL
 VOLTAGE: 500 VRMS @ SEA LEVEL
 INSULATION RESISTANCE:
 5,000 MEGOHMS MIN.

MECHANICAL:

MATERIAL SMP BODY: BeCu
 MATERIAL SMA BODY: PASS S STEEL
 CENTER CONTACTS: BeCu
 PLATING: Au PER MIL-G-45204
 INSULATOR: PTFE
 INTERFACE: SMP DESC 94007
 INTERFACE: SMA MIL-STD-348B
 OP. TEMP RANGE: -55° to +125°C
 ROHS COMPLIANT

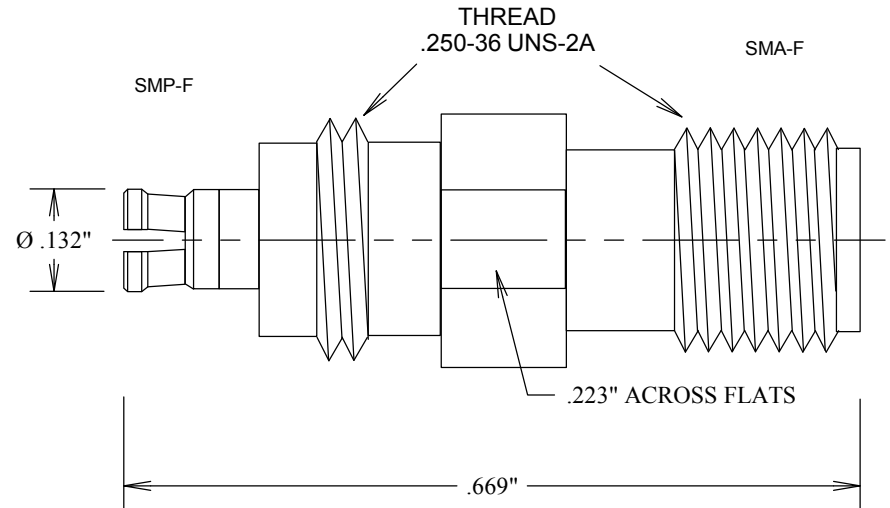

				S. M. ELECTRONICS L.L.C.	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICSLLC.COM	
				TITLE	
				ADAPTER SMP/F-SMA/F 18 GHZ	
SIZE		CAGE CODE	DWG NO	REV	
A		3FKR5	SM8803	--	
SCALE			SHEET		