

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.25:1 MAX

MECHANICAL:

MATERIAL SMP BODY: BeCu
 MATERIAL 2.4 BODY: PASS S STEEL
 CENTER CONTACT SMP: BeCu
 CENTER CONTACT 2.4: BRASS
 PLATING: Au PER MIL-G-45204
 INSULATOR: PTFE
 INTERFACE: SMP DESC 94007
 INTERFACE: 2.4 MIL-STD-348B
 OP. TEMP RANGE: -55° to +125°C
 ROHS COMPLIANT
 FORCE TO ENGAGE: 15.0 LBS MAX
 FORCE TO DISENGAGE: 5.0 LBS MIN

SMP-M
 DESC 94007

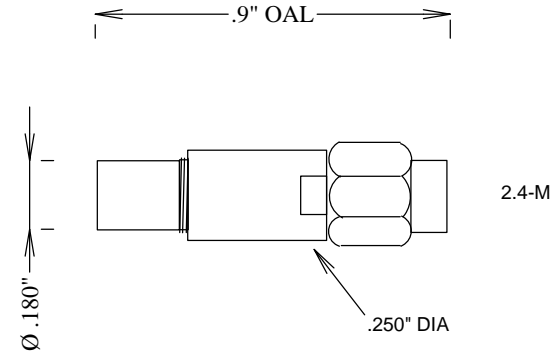

S. M. ELECTRONICS L.L.C.
 FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE
ADAPTER SMP/M FULL DET-2.4M 40 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM8867	--

SCALE	SHEET
-------	-------