


# SPECIFICATIONS

**ELECTRICAL:**  
 FREQUENCY: 0-26.5 GHZ  
 IMPEDANCE: 50 OHMS  
 VSWR: 1.2:1 MAX

**MECHANICAL:**  
 MATERIAL BODY: PASS S STEEL  
 CENTER CONTACT SMP: BeCU  
 CENTER CONTACT SMA: BRASS  
 CONTACT PLATING: Au PER MIL-G-45204  
 INSULATOR: PTFE  
 INTERFACE: SMA MIL-STD-348B  
 OP. TEMP RANGE: -55° to +125°C  
 ROHS COMPLIANT  
 SMP FORCE TO ENGAGE: 4.0 LBS MAX  
 SMP FORCE TO DISENGAGE: 2.5 LBS MIN

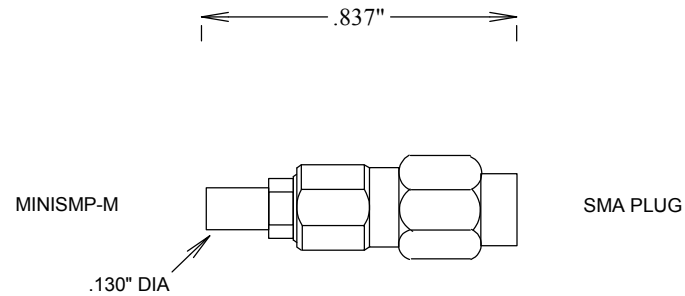

FULL DETENTE

|          |  |              |  |  |  |       |  |
|----------|--|--------------|--|--|--|-------|--|
|          |  |              |  | <b>S. M. ELECTRONICS L.L.C.</b>          |  |       |  |
|          |  |              |  | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US  |  |       |  |
|          |  |              |  | TITLE                                    |  |       |  |
|          |  |              |  | <b>ADAPTER MINISMP/M-SMAM 26.5GHZ FD</b> |  |       |  |
| SIZE     |  | CAGE CODE    |  | DWG NO                                   |  | REV   |  |
| <b>A</b> |  | <b>3FKR5</b> |  | <b>SM8904</b>                            |  | --    |  |
| SCALE    |  |              |  |  |  | SHEET |  |