


# SPECIFICATIONS

**ELECTRICAL:**  
 FREQUENCY: 0-40 GHZ  
 IMPEDANCE: 50 OHMS  
 VSWR: 1.25:1 MAX

**MECHANICAL:**  
 MATERIAL SMP BODY: BeCu  
 MATERIAL 2.92 BODY: PASS S STEEL  
 CENTER CONTACTS: BeCu  
 PLATING: Au PER MIL-G-45204  
 INSULATOR: PTFE  
 INTERFACE: SMP DESC 94007  
 INTERFACE: 2.92 MIL-STD-348B  
 OP. TEMP RANGE: -55° to +125°C  
 ROHS COMPLIANT  
 FORCE TO ENGAGE: 4.0 LBS MAX  
 FORCE TO DISENGAGE: 2.5 LBS MIN

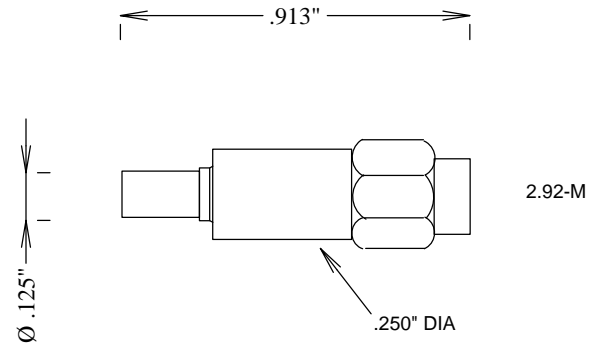

FULL DETENTE

				<b>S. M. ELECTRONICS L.L.C.</b>	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				ADAPTER MINI SMP/M FD-2.92/M 40GHZ	
SIZE		CAGE CODE	DWG NO		REV
A		3FKR5	SM8927		--
SCALE				SHEET	