

MCA2016

Dual 8 Way Active Splitter

This fully redundant high linearity multicoupler distributes satellite broadcast IF signals to multiple receivers. It features an 18 volt LNB power feed at each input, and offers an impressive 7 dB noise figure in conjunction with greater than 40 dB port to port isolation in a one RU height package.



Features

- Dual 1 X 8 Linear Multicoupler
- 1.75" Height 19" Rackmount
- Fully Redundant Medical Grade Power Supplies
- FCC Part 15 Certified

Typical Performance


950-1450 MHz

0 dB Gain

110 VAC 50/60 Hz Mains

7 dB Noise Figure

<150 pS Group Delay Variation

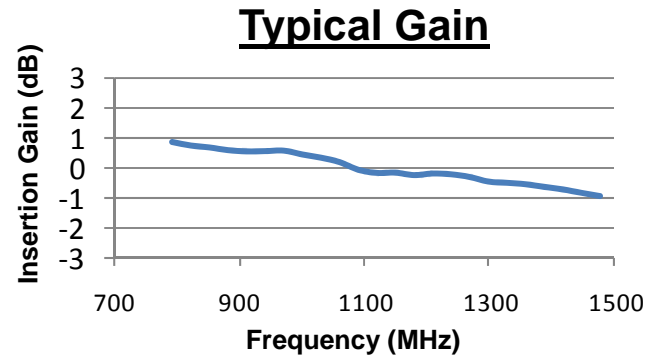

1.5:1 VSWR

40 dB Minimum Port to Port Isolation

Amplitude Flatness

± 0.5 dB / 40 MHz

± 1.0 dB / 500 MHz

Creative Amplification Products

Phone: +1 805 499 1166
Fax: +1 805 499 6649
E-mail: sales@capwireless.com
Web: www.capwireless.com

990097 Rev. 1
08/09

Summary Page

 **CAP Wireless, Inc.**

3235 Grande Vista Drive
Newbury Park, CA 91320