


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
 VSWR 1.15 MAX TO 4 GHZ
 1.20 MAX TO 6 GHZ
 1.30 MAX TO 18 GHZ
 POWER (AVG) 10 WATTS @ 25 DEG C
 POWER (PEAK) 1000 WATTS
 IMPEDANCE: 50 OHMS
 ATTENUATION ACCURACY:
 +/- .5 1-20 DB
 +/- 1.0 30 DB

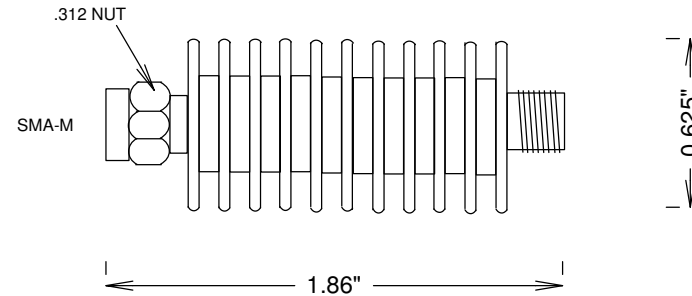

MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

RECOMMENDED TORQUE: 7-9 IN-LBS

ENVIRONMENTAL:

TEMP: -55 C TO +125 C

				S. M. ELECTRONICS	
				FAIRVIEW, TX WWW.SMELECTRONICS.US	
				TITLE	
				ATTENUATORS SMA M/F 4, 6, 18GHZ 5W	
SIZE	CAGE CODE	DWG NO	REV		
A		SA4S10W, SA6S10W, SA18S10W	A		
SCALE					SHEET