


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
 VSWR @ 18 GHZ: 1.30:1 MAX
 VSWR @ 40GHZ: 1.4:1 MAX
 POWER (AVG) 0.5 WATTS
 IMPEDANCE: 50 OHMS
 ATTENUATION ACCURACY:

	DC-26.5 GHZ	26.5-40 GHZ
0-6 dB	±0.50 dB	±0.80 dB
10-20 dB	±0.60 dB	±1.00 dB
30 dB	±0.80 dB	±1.00 dB

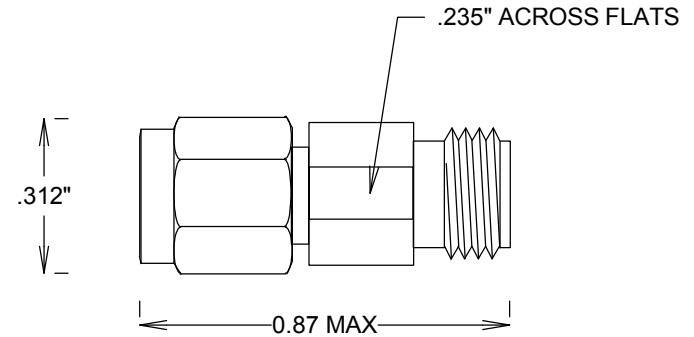

MECHANICAL:

MATERIAL BODY: PASSIVATED STAINLESS STEEL
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

ENVIRONMENTAL:

TEMP: -65 C TO +125 C

FAIRVIEW MICROWAVE

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ATTENUATORS 2.92 M/F 40GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SA4012-XX	--

SCALE

SHEET