




# S. M. ELECTRONICS ATTENUATORS

## SA6S5W, SA12S5W, SA18S5W SMA 5WATT SERIES

### KEY SPECIFICATIONS

- \*5 WATTS CW
- \*6GHZ (SA6S5W), 12GHZ (SA12S5W) & 18GHZ (SA18S5W) VERSIONS AVAILABLE
- \*1.20:1 MAX VSWR @ 6GHZ; 1.25 @ 12; 1.3 MAX @ 18GHZ
- \*RUGGED STAINLESS STEEL BODY
- \*1000 WATTS PEAK

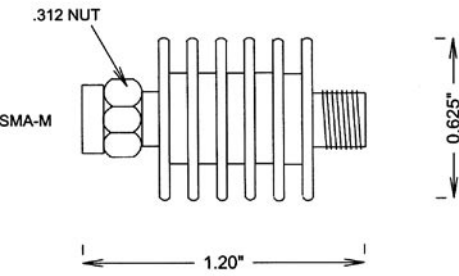

### ADDITIONAL SPECIFICATIONS

- \*-55 TO +125 DEG C
- \*1-30 DB STANDARD, 31-60DB OPTIONAL
- \*Au PLATED BeCu CONTACTS
- \*1-20 DB +/- .5DB; 21-30 +/- .75DB
- \*50 OHMS
- \*1.20" LENGTH