

eP5008R-LL.L Jacketed RG-402 eP-Formable

SMA Male Right Angle-SMA Male Right Angle



Summary

The eP-Formable series offers users the ability to hand form cable assemblies to final shape. evissaP offers its Standard Product eP-Formable cable assemblies in a wide variety of connector configurations, cable diameters and 2 outer jacket options (tin braid and FEP). Standard Product eP-Formable cable assemblies are built using lead free solder in combination with state-of-the art induction soldering techniques. Construction using lead based solder is offered and can be ordered by specifying eP5008S-LL.L.

Overview

- Impedance 50 ohms
- Frequency Range DC to 10 GHz
- Cable RG-402; FEP Jacketed
- Nominal Cable O.D. 0.163" nominal
- SMA Male Right Angle Stainless Steel coupling nut Ni/Au-plated brass body
- SMA Male Right Angle Stainless Steel coupling nut Ni/Au-plated brass body

Features

- Hand bend to final shape
- 100% VSWR test to 10 GHz
- 100% Hi-pot and continuity tests
- Fast delivery on standard lengths
- RoHS compliant per evissaP RoHS statement
- Cost-effective, manufactured in China at US wholly owned ISO9001:2000 facility

eP-Formable RG-402 Jacketed Cable Assembly

Unit price, typical delivery and +25° C performance to 10 GHz for popular cable lengths. Almost any cable length available in about 2 weeks.



Part Number	Popular Length inches	S11/S22 to 10 GHz (:1) Maximum	S21/S12 to 10 GHz (dB) Typical	Typical Delivery	10 to 24 pcs	25 to 49 pcs	50 to 99 pcs
eP5008R-03.0	3.0	1.35	0.535	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-04.0	4.0	1.35	0.580	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-05.0	5.0	1.35	0.625	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-06.0	6.0	1.35	0.670	stock	\$11.45	\$10.95	\$10.40
eP5008R-07.0	7.0	1.35	0.715	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-08.0	8.0	1.35	0.760	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-09.0	9.0	1.35	0.805	stock	\$11.45	\$10.95	\$10.40
eP5008R-10.0	10.0	1.35	0.850	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-11.0	11.0	1.35	0.895	stock-2 weeks	\$11.45	\$10.95	\$10.40
eP5008R-12.0	12.0	1.35	0.940	stock	\$11.45	\$10.95	\$10.40
eP5008R-13.0	13.0	1.35	0.985	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-14.0	14.0	1.35	1.030	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-15.0	15.0	1.35	1.075	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-16.0	16.0	1.35	1.120	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-17.0	17.0	1.35	1.165	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-18.0	18.0	1.35	1.210	stock-2 weeks	\$12.00	\$11.50	\$10.95
eP5008R-24.0	24.0	1.35	1.480	stock-2 weeks	\$15.30	\$14.55	\$13.85
eP5008R-36.0	36.0	1.35	2.020	stock-2 weeks	\$19.65	\$18.70	\$17.80
eP5008R-48.0	48.0	1.35	2.560	stock-2 weeks	\$25.10	\$23.95	\$22.75
eP5008R-60.0	60.0	1.35	3.100	stock-2 weeks	\$33.65	\$32.00	\$30.50
eP5008R-72.0	72.0	1.35	3.640	stock-2 weeks	\$45.50	\$43.40	\$41.35

Bold print indicates item is typically deliverable from stock.


Typical Maximum Insertion Loss (dB) at +25° C will be 0.4 dB + 0.045 x length (in inches).

Available in most any lengths. Prices are unit prices (price each) and in US dollars. Custom requirements welcome.

Typical performance @ +25° C

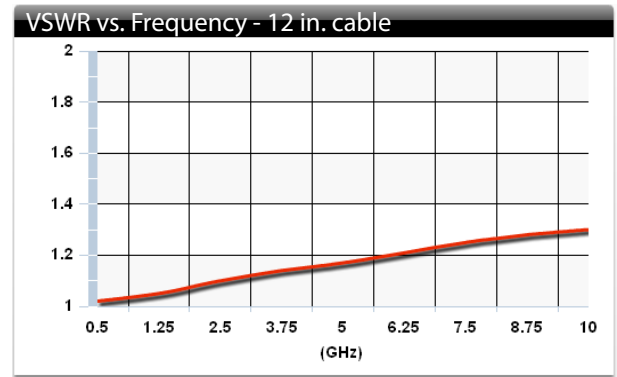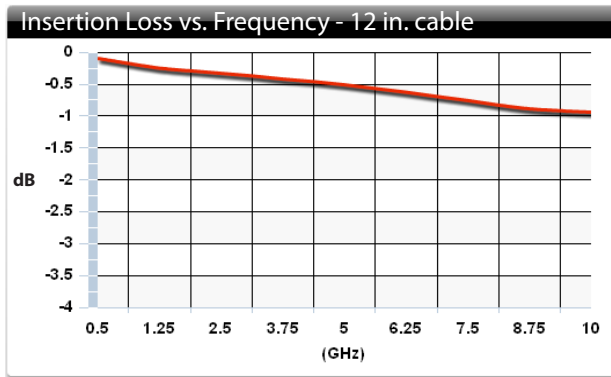

Outline Drawing

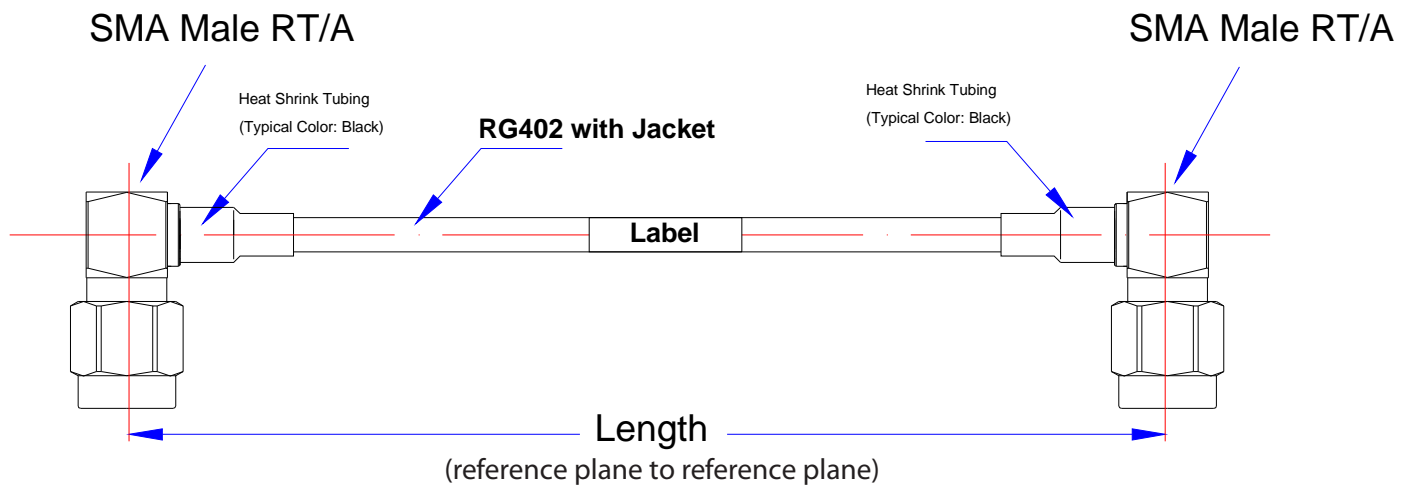

Standard Length Tolerances

L (inches)	Tolerance (inches)
2 - 5.9	+/- 0.125
6 - 11.9	+/- 0.187
12 - 23.9	+/- 0.250
24 - 35.9	+/- 0.313
36 - 47.9	+/- 0.375
48 - 59.9	+/- 0.500
60 - 71.9	+/- 0.563
72 - 83.9	+/- 0.625
> 83.9	Please contact evissaP

evissaP Standards

- When ordering, please specify cable assembly length in inches. Example: eP5008R-12.5 specifies a 12.5" long cable assembly.
- Label will have evissaP P/N and Date Code.
- Shipment will include evissaP's standard C of C.
- evissaP warranty applies.
- FOB is evissaP's San Jose, CA facility.