

SPECIFICATIONS

ELECTRICAL:




FREQUENCY: 0-18 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: STAINLESS STEEL AU PLATING 3μ"
 CENTER CONTACT: BRASS GOLD PLATED 50μ"

ASSEMBLY

TRIM CABLE AS SHOWN,
 SOLDER PIN TO CENTER CONDUCTOR,
 INSERT CABLE INTO SMA BODY,
 SOLDER CABLE JACKET WHILE KEEPING END OF
 CABLE FLUSH WITH TEFLON & CHECKING FINAL
 PIN DEPTH

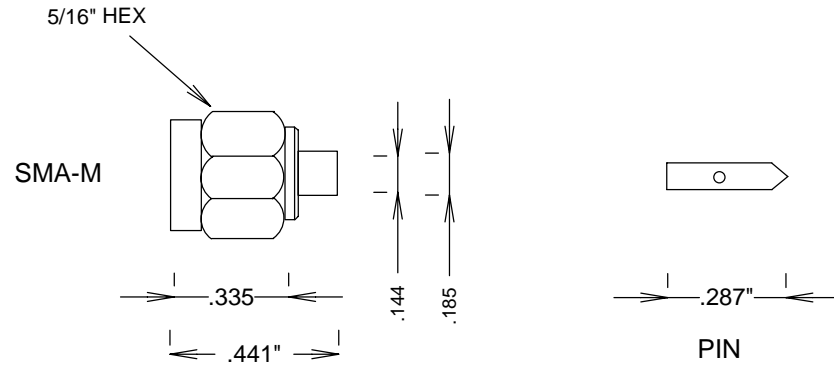

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				SMA-M CONN .141SR DIRECT SOLDER	
SIZE		CAGE CODE	DWG NO		REV
A		3FKR5	SC3010		--
SCALE				SHEET	