

# SPECIFICATIONS


**ELECTRICAL:**

FREQUENCY: 0-18 GHZ  
 IMPEDANCE: 50 OHMS

**MECHANICAL:**

MATERIAL BODY: STAINLESS STEEL  
 CENTER CONTACT: BeCu Au PLATED MIL-G-45204  
 INSULATOR: TEFLON  
 INTERFACE: MIL-STD-883A  
 ROHS COMPLIANT  
 OP. TEMP RANGE: -55°C to +155°C

SC3774 Au PLATING  
 SC3775 PASSIVATED

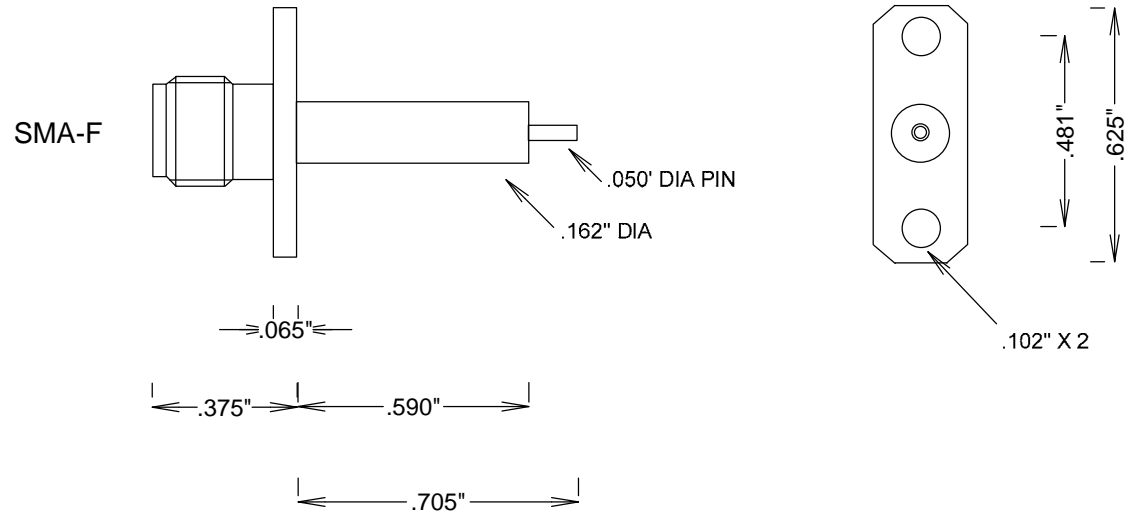

				<b>S. M. ELECTRONICS L.L.C.</b>			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				<b>SMA-F PANEL POST CONTACT</b>			
SIZE	CAGE CODE	DWG NO			REV		
<b>A</b>	<b>3FKR5</b>	<b>SC3774, SC3775</b>			<b>A</b>		
SCALE			SHEET				