


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55° to +125°C


MECHANICAL:

MATERIAL: KOVAR
 PLATING: Au PER MIL-G-45204
 INTERFACE: SMP DESC 94007
 FULL DETENTE
 FORCE TO ENGAGE: 15 LBS MAX
 FORCE TO DISENGAGE: 5LBS MIN
 ROHS COMPLIANT



.140"

.135"

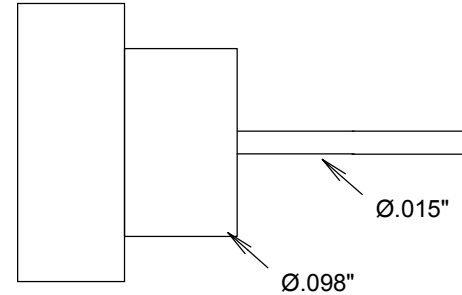

.060"



				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SMP MALE FULL DETENTE HERMETIC SHROUD			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SC5280		--	
SCALE				SHEET			