


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: KOVAR
 PLATING: Au PER MIL-G-45204
 INTERFACE: SMP DESC 94007
 FULL DETENTE
 FORCE TO ENGAGE: 15 LBS MAX
 FORCE TO DISENGAGE: 5LBS MIN
 ROHS COMPLIANT

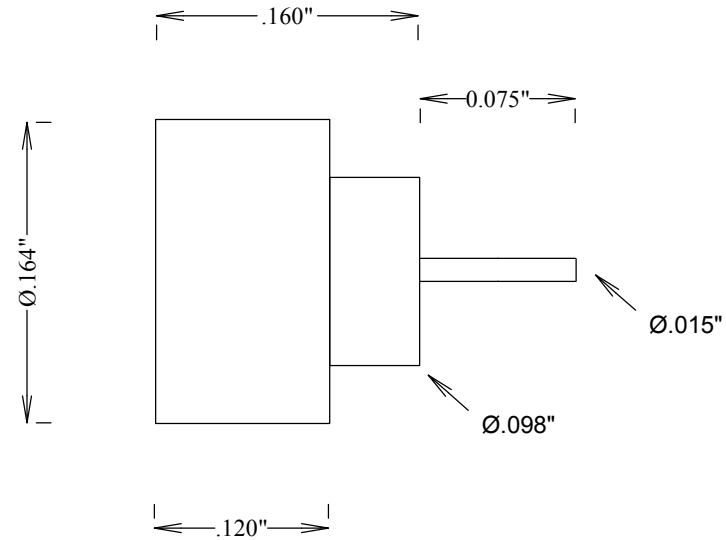

S. M. ELECTRONICS L.L.C.
 FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE
**SMP MALE FULL DETENTE
 HERMETIC SHROUD**

SIZE A	CAGE CODE 3FKR5	DWG NO SC5290	REV --
------------------	---------------------------	-------------------------	-----------

SCALE	SHEET
-------	-------