





# SPECIFICATIONS

## ELECTRICAL:

FREQUENCY: 0-40 GHZ  
 IMPEDANCE: 50 OHMS  
 OP. TEMP RANGE: -55° to +125°C

## MECHANICAL:

MATERIAL: KOVAR  
 PLATING: Au PER MIL-G-45204  
 INTERFACE: SMP DESC 94007  
 LIMITED DETENTE  
 FORCE TO ENGAGE: 10.0 LBS MAX  
 FORCE TO DISENGAGE: 2.0 LBS MIN  
 ROHS COMPLIANT

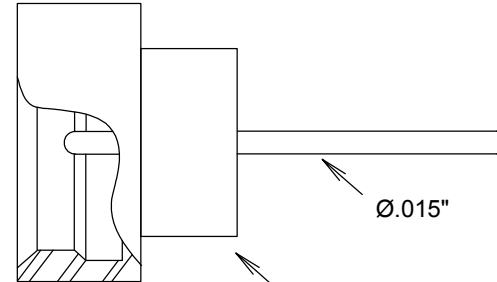

Ø.098"

Ø.015"

.060"

**S. M. ELECTRONICS L.L.C.**  
 FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE  
**SMP MALE LIMITED DETENTE  
 HERMETIC SHROUD**

SIZE <b>A</b>	CAGE CODE <b>3FKR5</b>	DWG NO <b>SC5292</b>	REV <b>A</b>
------------------	---------------------------	-------------------------	-----------------

SCALE SHEET

