

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55° to +125°C

MECHANICAL:


MATERIAL: PASSIVATED S STEEL
 INTERFACE: SMP DESC 94007
 FULL DETENTE
 FORCE TO ENGAGE: 15 LBS MAX
 FORCE TO DISENGAGE: 5LBS MIN
 ROHS COMPLIANT

← .187" →

→ .120" OAL ←

→ .045" ←

→ .004" ←

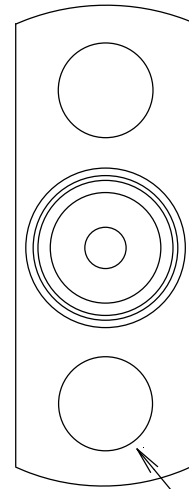


↑ .328" ↓

↑ Ø.480" ↓

Ø.098" 2X

↑ Ø.165" ↓



↑ Ø.155" ↓

S. M. ELECTRONICS L.L.C.
 FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE
**SMP MALE FULL DETENTE
 SHROUD .328 SPACING**

SIZE A	CAGE CODE 3FKR5	DWG NO SC5301	REV --
------------------	---------------------------	-------------------------	------------------

SCALE	SHEET
-------	-------