


SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-4 GHZ
 VSWR 1.2:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: BRASS, NICKLE PLATED
 CENTER CONTACT: BRASS
 CONTACT PLATING: Si QQ-S-365
 CAPTIVATED CONTACT
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A
 ROHS COMPLIANT

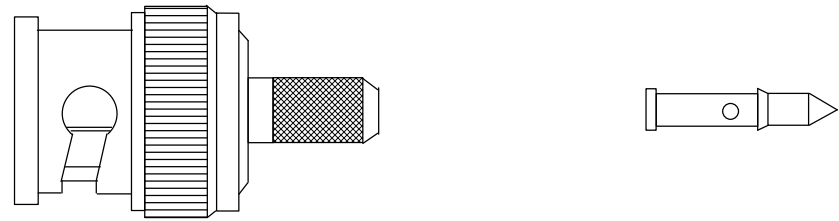

0.94"

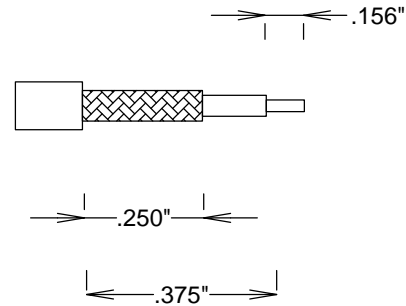

STRIPPING DIMENSIONS

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				BNC-M CRIMP CONN RG316 RG174	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	SC6032	--		
SCALE			SHEET		