

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-4 GHZ
 VSWR 1.2:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: BRASS, NICKLE PLATED
 CENTER CONTACT: BRASS
 CONTACT PLATING: Si QQ-S-365
 FERRULE PLATING: Au
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A
 ROHS COMPLIANT

ASSEMBLY INSTRUCTIONS:

TRIM CABLE AS SHOWN;
 SLIDE BACKNUT, WASHER, GASKET, CLAMP ON CABLE;
 SOLDER FERRULE TO JACKET;
 SOLDER CONTACT TO CENTER CONDUCTOR
 INSERT CABLE ASSEMBLY INTO JACKET & TIGHTEN BACKNUT

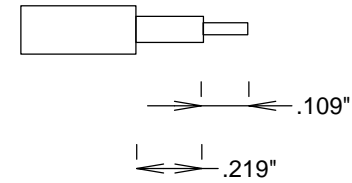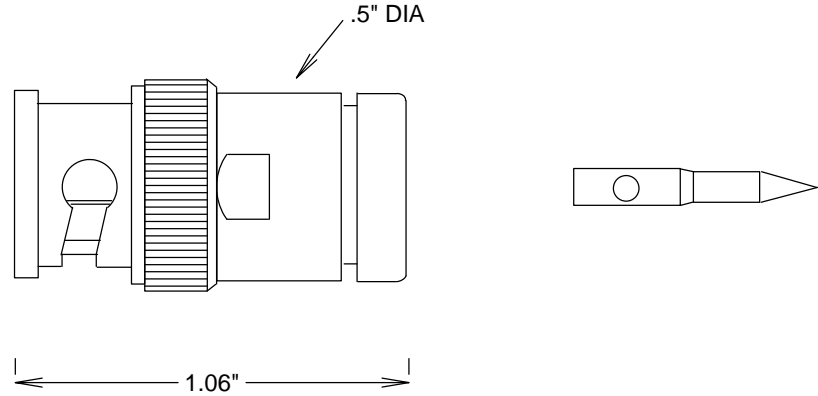

STRIPPING DIMENSIONS

				S. M. ELECTRONICS	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				BNC-M CONN .141" SR CLAMP	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	SC6045	--		
SCALE			SHEET		