

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-18 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C


MECHANICAL:

MATERIAL BODY: PASSIVATED S STEEL
 CENTER CONTACT: BeCu
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A

ROHS COMPLIANT

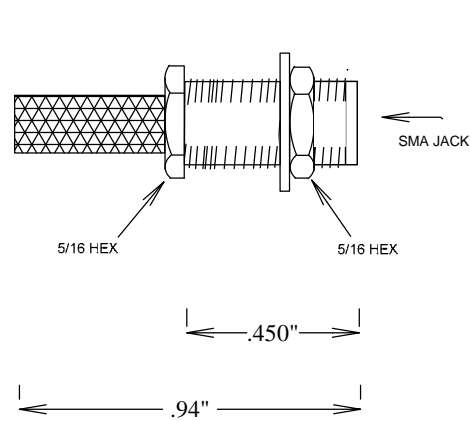

RECOMMENDED PANEL CUTOUT

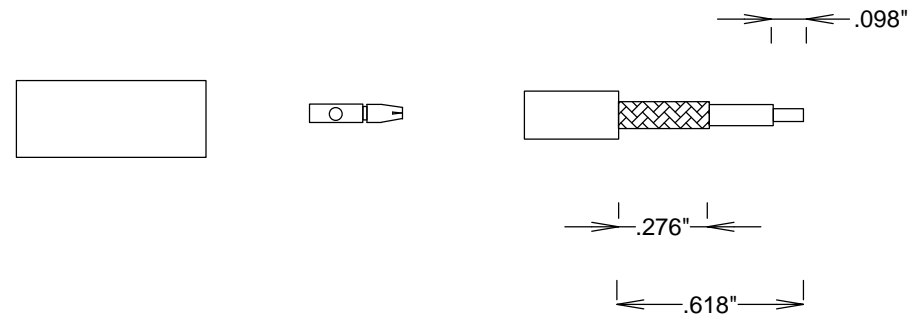

STRIPPING DIMENSIONS

				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SMA-F BULKHEAD RG58 CRIMP CONN.			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SC7071		A	
SCALE						SHEET	