

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-18 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: PASSIVATED S STEEL
 CENTER CONTACT: BeCu
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A

ROHS COMPLIANT

SC7077: Au PLATING
 SC7079: PASSIVATED

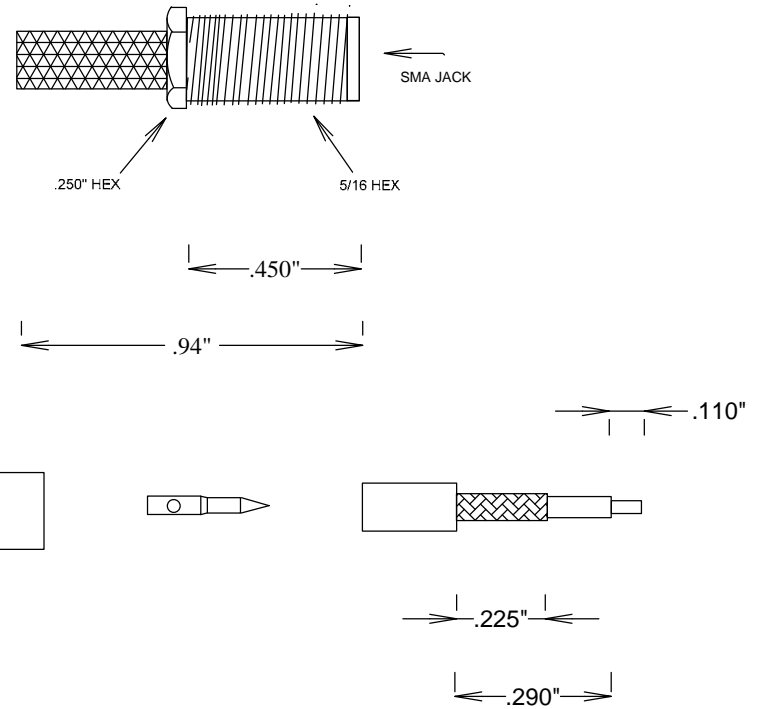

STRIPPING DIMENSIONS

				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				SMA-F RG174, RG316 CRIMP CONN.			
SIZE	CAGE CODE	DWG NO		SC7077, SC7079		REV	
A	3FKR5					A	
SCALE						SHEET	