

SPECIFICATIONS



ELECTRICAL:

FREQUENCY: 0-12 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS


MECHANICAL:

MATERIAL BODY: Si PLATED BRASS 80μ"
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au 3μ"
 DIELECTRIC: PTFE
 INTERFACE: MIL-STD-348B
 ROHS COMPLIANT
 OP. TEMP RANGE: -55°C- +155°C

CABLES: LMR240, RG8X, BELDEN 9258

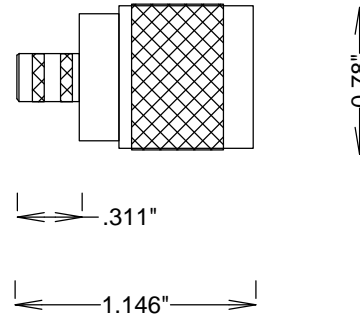

RECOMMENDED CRIMP DIE .068" & 0.255"

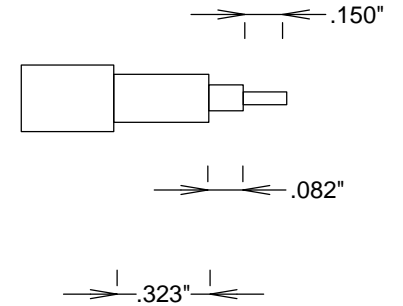

STRIPPING DIMENSIONS

CRIMP BOTH CONTACT & SHIELD; SOLDERLESS

| | | | | | | | |
|----------|--------------|---------------|-------|---|--|--|--|
| | | | | S. M. ELECTRONICS L.L.C. | | | |
| | | | | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US | | | |
| | | | | TITLE | | | |
| | | | | N-M CRIMP LMR240 SOLDERLESS | | | |
| SIZE | CAGE CODE | DWG NO | REV | | | | |
| A | 3FKR5 | SC9114 | -- | | | | |
| SCALE | | | SHEET | | | | |