

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-12 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: Ni PLATED BRASS 100 μ "
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au 3 μ "
 DIELECTRIC: PTFE
 INTERFACE: MIL-STD-348B
 ROHS COMPLIANT
 OP. TEMP RANGE: -55°C- +155°C

CABLES: LMR400, RG8, BELDEN 8267

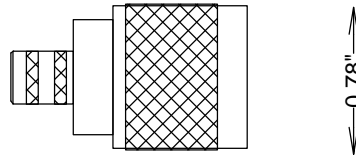


1.235"

0.78"



RECOMMENDED CRIMP DIE .128 & .429"

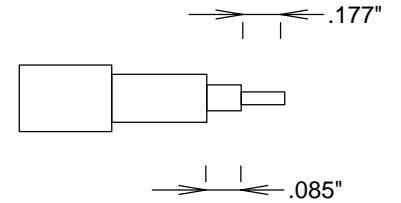

.374"

STRIPPING DIMENSIONS

CRIMP BOTH CONTACT & SHIELD; SOLDERLESS

				S. M. ELECTRONICS L.L.C.	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				N-M CRIMP LMR400 SOLDERLESS	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	SC9116	--		
SCALE			SHEET		