


Component positioning before inserting pin into connector

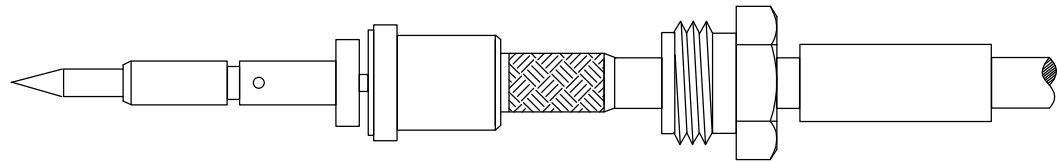

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-11 GHZ
 VSWR 1.3:1 MAX @ 9 GHZ
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: NICKLE PLATED BRASS
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au
 INSULATOR: TEFLON
 ROHS COMPLIANT
 OP. TEMP RANGE: -55°C- +155°C

STRIPPING DIMENSIONS

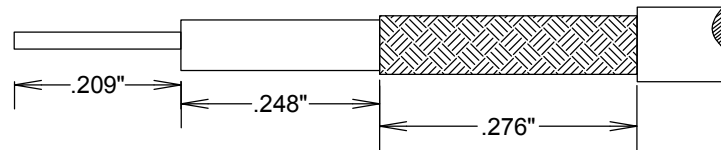

				FAIRVIEW MICROWAVE INC.			
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
				TITLE			
				N-M CRIMP RG174, RG316			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SC9120			
SCALE				SHEET			