

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-11 GHZ
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BRASS
 CENTER CONTACT: BeCu
 CONTACT PLATING: Au MIL-G-45204
 CAPTIVATED CONTACT
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-883A
 N: MIL-PRF-39012
 OP. TEMP RANGE: -55°C to +165°C
 ROHS COMPLIANT

SC9228 NICKLE PLATING
 SC9232 SILVER PLATING

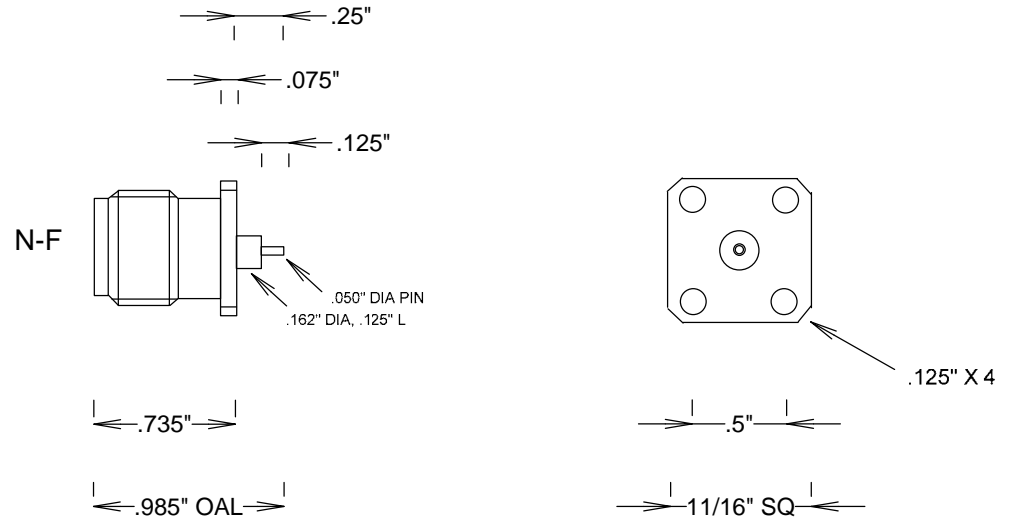

SC9228 NICKLE
 SC9232 SILVER

| | | | | | |
|----------|--------------|-----------------------|-------|---|-----------|
| | | | | S. M. ELECTRONICS L.L.C. | |
| | | | | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US | |
| | | | | TITLE | |
| | | | | N-F PANEL POST CONTACT | |
| SIZE | CAGE CODE | DWG NO | | | REV |
| A | 3FKR5 | SC9228, SC9232 | | | -- |
| SCALE | | | SHEET | | |