


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-12 GHZ
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BRASS NI PLATING
 CENTER CONTACT: BeCu Au PLATED MIL-G-45204
 INSULATOR: TEFLON
 CAPTIVATED CONTACT
 INTERFACE: MIL-STD-883A
 OP. TEMP RANGE: -55°C to +155°C
 ROHS COMPLIANT

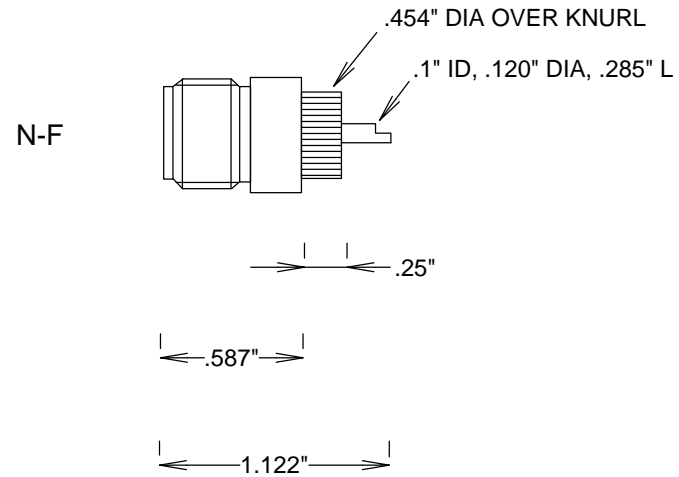

MOUNTING HOLE .450 +/- .001"
 MINIMUM PANEL 0.200"

S. M. ELECTRONICS L.L.C.
 FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US

TITLE

N-F PRESSMOUNT

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC9271	--
SCALE	SHEET		