

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-6 GHZ
 VSWR 1.25:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C to +125C

MECHANICAL:

MATERIAL BODY: BRASS AU PLATING 3μ"
 CENTER CONTACT: Brass
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON

ASSEMBLY

TRIM CABLE AS SHOWN,
 SLIDE CRIMP SLEEVE ON CABLE,
 SOLDER ON CONTACT,
 INSERT CABLE INTO BODY,
 CRIMP

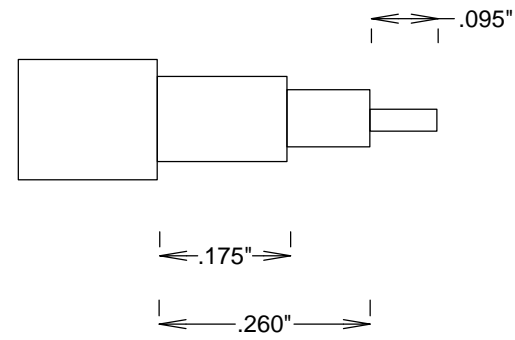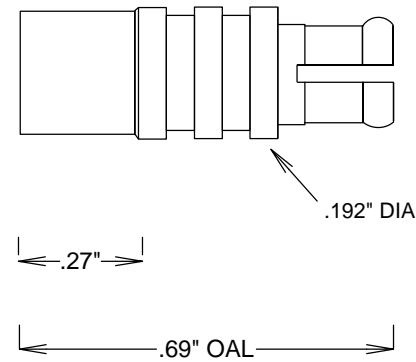

STRIPPING DIMENSIONS

				S. M. ELECTRONICS L.L.C.	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				MCX-PLUG RG174 RG316 CRIMP	
SIZE		CAGE CODE	DWG NO	REV	
A		3FKR5	SC9415	--	
SCALE			SHEET		