

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-6 GHZ
 VSWR 1.25:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C to +125C

MECHANICAL:

MATERIAL BODY: BRASS AU PLATING
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au MIL-G-45204
 CAPTIVATED CONTACT
 INSULATOR: TEFLON
 ROHS COMPLIANT

ASSEMBLY

TRIM CABLE AS SHOWN,
 SLIDE CRIMP SLEEVE ON CABLE,
 PUSH CABLE INTO CONTACT SLOT,
 SLIDE SLEEVE FORWARD & CRIMP,
 SOLDER CENTER CONDUCTOR,
 APPLY CAP

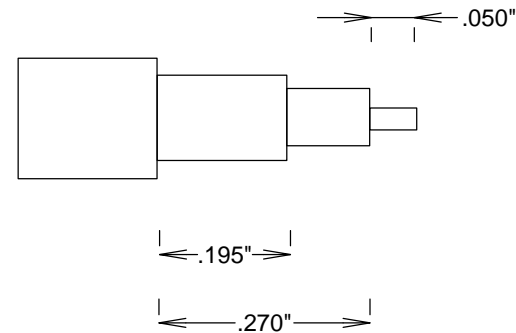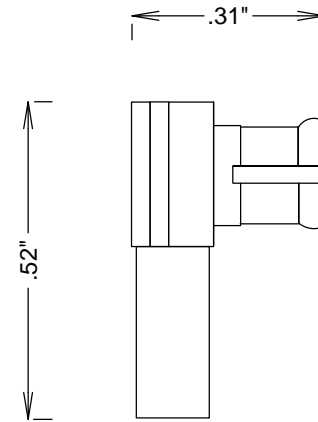

STRIPPING DIMENSIONS

| | | | | | |
|-------|-----------|--------|-------|---|--|
| | | | | S. M. ELECTRONICS L.L.C. | |
| | | | | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US | |
| | | | | TITLE | |
| | | | | MCX-PLUG RG174 RG316 RIGHT ANGLE | |
| SIZE | CAGE CODE | DWG NO | REV | | |
| A | 3FKR5 | SC9465 | -- | | |
| SCALE | | | SHEET | | |